




Trends Combo 14 Desktop Hi-Fi System

Version 1.0

USER GUIDE

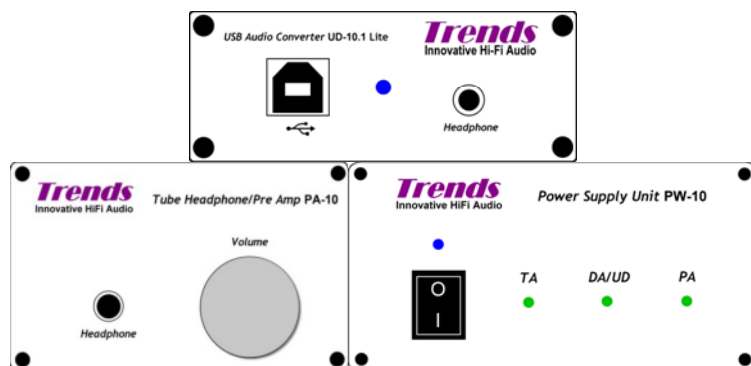

Copyright Notice

Copyright © 2006 ITOK Technologies Limited, All rights reserved. All rights in this publication are reserved and no part may be reproduced without the prior written permission of the publisher. The contents of this publication are believed to be correct at the time of going to press, but any information, specifications, products or services mentioned may be modified, supplemented or withdrawn without further notice.

Trademarks

Trends, Trends Audio, and ITOK are the trademarks owned by ITOK Technologies Limited

Tripath is the registered trademark owned by Tripath Technology Inc.

All other trademarks are the property of their respective owners.



ITOK Technologies Limited
Rm. K, 11/F, Kwun Tong Ind. Centre, Phase 1
472-484 Kwun Tong Road, Kowloon, Hong Kong
Tel : +852 2304 0730
Fax : +852 2566 5740
Email : sales@TrendsAudio.com
Website : www.TrendsAudio.com

Table of Content

TABLE OF CONTENT	3
1. SAFETY INSTRUCTIONS	4
2. INTRODUCTION	5
3. PACKING LIST	5
4. FEATURES	5
5. OVERVIEW	7
5.1 TRENDS UD-10.1 LITE USB AUDIO CONVERTER	7
5.2 TRENDS PA-10 SE/GE TUBE HEADPHONE/PRE-AMPLIFIER.....	8
5.3 TRENDS PW-10 PSU	9
5.4 COMPLETE TRENDS COMBO 14.....	10
6. CONNECTION AND OPERATION	11
7. TECHNICAL NOTES (FOR PROFESSIONAL USER ONLY) ..	11
7.1 JUMPER SETTING FOR DIFFERENT TUBE SERIES.....	11
7.2 DC BIAS VOLTAGE TUNING FOR TRENDS PA-10 SE/GE.....	12
8. SPECIFICATION	13
8.1 TRENDS UD-10.1 LITE USB AUDIO CONVERTER	13
8.2 TRENDS CQ-125 3.5MM RCA AUDIOPHILE CABLE	13
8.3 TRENDS PW-10 PSU	14
8.4 TRENDS PA-10 GE/SE TUBE HEADPHONE/PRE-AMPLIFIER	14
9. TROUBLESHOOTING	15
10. ACCESSORIES	15
11. REGULATORY COMPLIANCE	16
12. CONTACT US	16

1. Safety Instructions

Please take note the following instructions before installing your Trends Combo 14 Hi-Fi System, they will enable you to get the best performance and prolong the life of the product.

- 1.) **Ensure that Trends PW-10 PSU's I/O switch is off when it does not operate.** It is recommended that you return your Trends PW-10 PSU to us or a qualified dealer for any service or repair. Incorrect assembly may result in electric shock or fire.
- 2.) To reduce the risk of electric shock, unplug the power supply from the outlet before attempting any maintenance or cleaning. Turning off controls will not reduce this risk.
- 3.) Never use an extension cord unless absolutely necessary. **If an extension cord must be used make sure that the pins on the plug are the same number, size and shape as those of the original power supply plug.**
- 4.) Place the unit in an area that will allow air to flow freely around the unit. DO NOT block or obstruct vent openings on the side/bottom of the unit.
- 5.) Your power supply should be grounded to reduce the risk of electric shock.
- 6.) The cord must be plugged into an outlet that is properly installed and grounded in accordance with all local codes and ordinances. Never alter the AC cord of plug provided. If the cord will not fit the outlet, have a proper outlet installed by qualified electrician. Improper connection can result in risk of electric shock.
- 7.) This unit must not be exposed to dripping or splashing water or other liquids. No objects filled with liquid, such as vases, shall be placed on the unit. In the event, switch off immediately, disconnect from the main supply and contact your dealer or us for advice.
- 8.) Do not route the power cable so that it can be walked upon or damaged by other items near it.
- 9.) Electronic audio components have a running in period of around a week (if used several hours per day). This will allow the new components to settle down; the sonic properties will improve over this time.
- 10.) If you do not intend to use this unit for a long period of time, unplug it from main socket.
- 11.) To clean the unit, wipe its case with a moist, lint-free cloth. Do not use any cleaning fluids containing alcohol, ammonia or abrasives. Do not spray an aerosol at or near any component of Trends Combo 14.
- 12.) These units are not user serviceable, never attempt to repair, disassemble or reconstruct the unit if there seems to be a problem. A serious electric shock could result if this precautionary measure is ignored. In the event of a problem or failure, please contact your dealer or us.

2. Introduction

Thank you for purchasing Trends Combo 14 Hi-Fi System.

This package provides a set of advanced Desktop Hi-Fi System. By conjoining Trends UD-10.1 Lite USB Audio Converter, Trends PA-10 SE/GE Tube Headphone/Pre-Amplifier, Trends PW-10 PSU, and any DAC, Trends Audio perfectly integrates your PC/Mac and Smartphone into your audio system with better sound quality, larger storage capacity and a more user-friendly interface than most standard CD players.

Trends PW-10 PSU concurrently support THREE audio appliances: (TA-10, PA-10, UD-10 or DA-10), making Trends Combo 14 perfect for integrating your Desktop PC, iPhone/iPod/iPad or Smartphone into your audio system and achieves the sound quality of high-end Hi-Fi but in a very affordable price.

3. Packing List

- Trends UD-10.1 Lite USB Audio Converter (body) x 1 pcs
- Trends PA-10 SE/GE Tube Headphone/Pre-Amplifier (body) x 1 pcs
- Trends PW-10 Power Supply Unit x 1 pcs
- Trends CQ-125 3.5mm RCA Audiophile Cable x 1 pcs

4. Features


- One Transformer-based linear mode power supply concurrently supports THREE audio appliances: (UD-10.1 Lite, PA-10 & TA-10.2P or TA-10.2 SE).
- Compact design (mini-size & light weight), easy portable and setup for Hi-Fi room, living room, sleeping room or even right beside your laptop computer.
- High-end Burr Brown PCM2704 IC for USB audio conversion.
- Separated digital/analog ground. The digital GND (network) and the analog GND (solid) is totally separated except connected via a ferrite bead in a single point. It effectively reduces interference between digital signals and analog signals.
- Applied RS422 driving IC to concurrently drive 2 groups of digital outputs. Audiophiles can compare the differences between these digital outputs instantly or play for the Bi-DACs.
- Proprietary impedance matching circuits for Coaxial(75ohm) digital outputs.
- Applied the specially designed pulse transformers for Coaxial outputs to further isolated interference from UD-10.1 Lite to the external DAC. The most pure, accurate, standard digital signal is then regenerated with minimum interference and jitter.

- Plug-and-play without driver installation for most PC/Mac operating systems, e.g. Windows 7, Windows 2000, Windows XP and Mac OS X or above.
- Audiophile grade transformer is tailor-made for Trends Combo Hi-Fi System.
- Specific circuit design and components of Trends PW-10 PSU applied for different power usage characteristics, which perfect match the different applications in high-frequency, high-current, digital and/or analog circuits for Trends Combo Hi-Fi System.
- High quality EMI noise filter in Trends PW-10 PSU is added to filter out those high frequency noise inducted from the global electricity network from Trends Combo Hi-Fi System.
- Built-in over-current protection and over-temperature protection design in the power amplifier.
- Unique air-core inductor in power amplifier used (instead of magnetic-core) for better sound.
- Innovative circuit design of low voltage hybrid (tube/transistor) & pure class-A circuit pre-amplifier to provide the best sound performance and easy/safe DIYer accessibility.
- The pre-amplifier supports both 6DJ8/6922 series and 12AU7 series tubes by simply switching the jumpers. DIYers can easily change their both series tubes to enjoy the fun.
- ONE bi-triode 6DJ8/6922 or 12AU7 tube as voltage amplification and TWO MOSFETs as output driver the pre-amplifier perform the warm, comfortable tube sound and in addition, guarantee the high fidelity & sufficient driving power to the next power amplifier stage.
- Provide TWO sets of switchable audio inputs in the pre-amplifier. Besides the normal CD input, the PC/iPod input with higher gain is provided for small output PC/Mac/iPod/iPad.
- Besides the normal audio output in the back panel, ONE headphone output in the front of the pre-amplifier to drive even high-impedance audiophile-grade headphones.
- TWO precise screw-driving potentiometers for professional audiophiles to adjust the tube's bias voltage to guarantee the best working point for different tubes.
- The stylish aluminium case provides outstanding shielding & grounding capability to keeps the background silent and maximizes the S/N ratio.

5. Overview


5.1 Trends UD-10.1 Lite USB Audio Converter

Front View

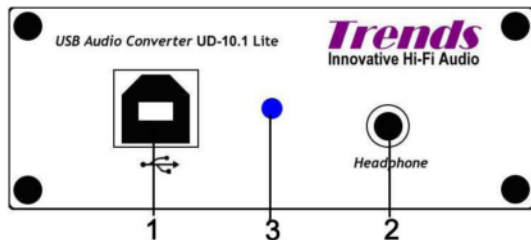

1. USB Socket
2. Headphone Socket
3. Power Indicator


Back View

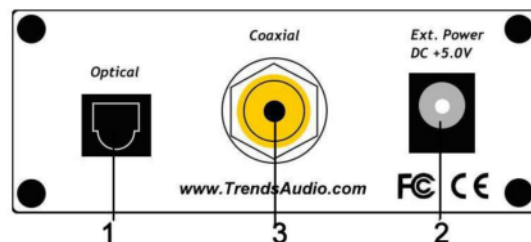

1. Optical
2. Power Socket
3. Coaxial RCA


5.2 Trends PA-10 SE/GE Tube Headphone/Pre-Amplifier

Front View

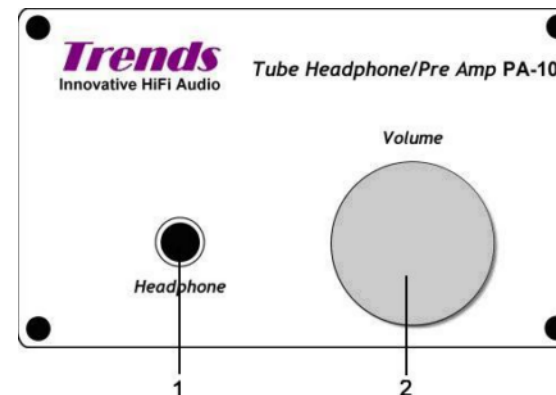

1. Headphone Socket
2. Volume Controller – Turn anti-clockwise to lower down volume, and vice versa


Back View

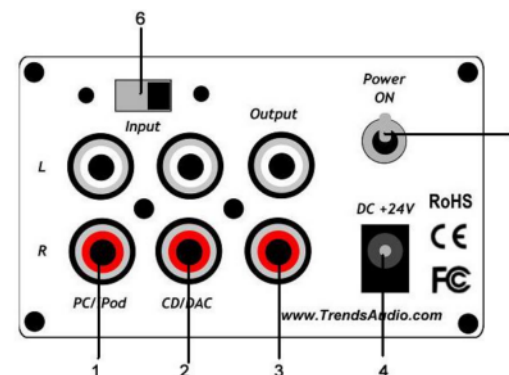

1. PC/iPod - Input from PC/Mac/iPod with higher gain using 2RCA-2RCA cable
2. CD/DAC - Input from CD/DAC using audio cable (2RCA-2RCA)
3. Output - To any line level input on your amplifier using audio cable (2RCA-2RCA)
4. Power Supply Socket - Plug Trends PW-10 PSU to this socket to supply power
5. Power ON/OFF switch - pull up to power on and pull down to off
6. Input - Selection for CD/DAC or PC/iPod input. The default is CD/DAC input


5.3 Trends PW-10 PSU

Front View

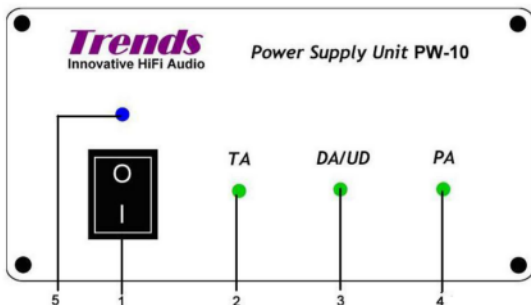


1. Power ON/OFF Switch
2. Power Indicator of the Amplifier Unit
3. Power Indicator of the Digital/Analogue Converter Unit
4. Power Indicator of the Pre-Amp Unit
5. Main Power Indicator

Back View

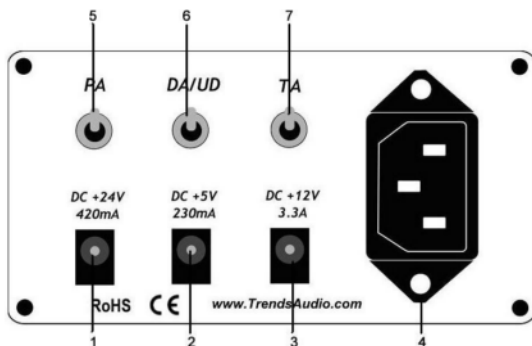

1. Power Supply Socket for the Pre-Amp Unit
2. Power Supply Socket for the DA/UD Unit
3. Power Supply Socket for the Amplifier Unit
4. Main Power Supply Socket
5. Power ON/OFF Switch - pull up to power on the Pre-Amp Unit, pull down to off
6. Power ON/OFF Switch - pull up to power on the DA/UD Unit, pull down to off
7. Power ON/OFF Switch - pull up to power on the Amplifier Unit, pull down to off

5.4 Complete Trends Combo 14

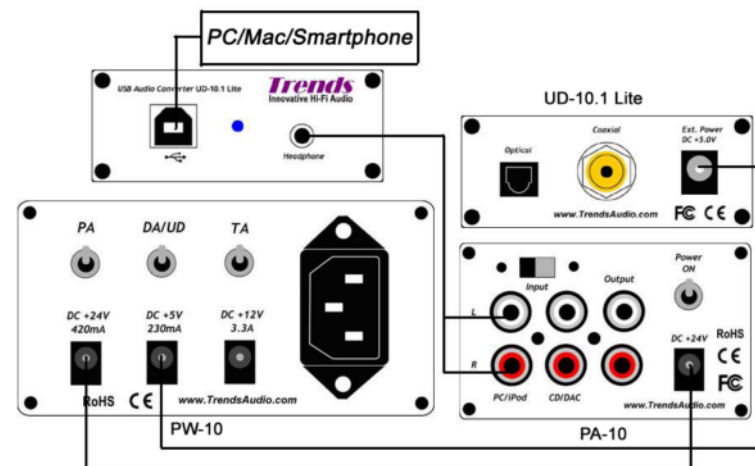

6. Connection and Operation

WARNING! Before plugging the unit to the AC outlet, please check that your local supply voltage is **110V AC** or **220V AC** (**specific model should be selected, not compatible**)

- Turn off the I/O switch of Trends PW-10 PSU, unplug it from the AC outlet.
- Ensure that the connections are secure and tight.
- Plug the Trends PW-10 PSU into the AC outlet, and press the I/O switch of the Trends PW-10 PSU to “I”, then “Blue” indicator in the switch illuminates.
- If the indicator fails to light, recheck the connection and AC outlet.
- Turn on DA/UD and observe that the “Green” indicator, and then switch on Trends UD-10.1 Lite USB Audio Converter.
- Turn on PA and observe that the “Green” indicator, and then switch on Trends PA-10 SE/GE Tube Headphone/Pre-Amplifier.

OPERATE IN A WELL VENTILATED OPEN AND COOL AREA. DO NOT BLOCK THE OPENINGS AT THE FAN DISCHARGE ON THE BOTTOM AND THE SUCTION OPENINGS ON THE SIDES.









7. Technical Notes (for professional user only)

7.1 Jumper Setting for Different Tube Series

Trends Audio has already pre-set the jumpers and fine-tuned the DC bias voltage of each PA-10 with the packaged vacuum tube before shipping. However, changing different tubes to taste for different sound is the great fun for many audiophiles and also a great feature of PA-10. There are some important notes should be aware before changing tubes.

Trends PA-10 supports two major tube series: (1) **6DJ8, 6922, 6N11, 6H23n, ECC88, E88CC, etc...**, and (2) **12AU7, 5963, 5814, ECC82, etc...** If you change the tube within the same series, it needs to re-tune the DC bias voltages ONLY. If you change the tube from another series, it needs both to re-tune the DC bias voltages and re-set the jumpers. **Otherwise, the tube may be burnt out.**

You can simply configure the amplifier to support the two different tube series by resetting the jumpers in J3, J4, J5 in the PCB as follows. (Remember to power OFF the machine before setting)

	6DJ8 Series	12AU7 Series
J3	 	 
J4		
J5		


7.2 DC Bias Voltage Tuning for Trends PA-10 SE/GE

Since each tube may deviate a bit in parameters, especially from different series, it needs to re-tune the DC bias voltages to guarantee the machine is working in the best point and performing the best sound quality.

There are two blue precise adjustable potentiometers (R3, R13) inside Trends PA-10 for tuning the DC bias voltage of each channel. The DC bias has been tuned in factory. But after run-in for a period or changed another tube, it would be deviated that the fine-tuning is needed.

Before you tune these, you need a screwdriver (take off the case), a small screwdriver (turn the screw of the potentiometer) and a (digital) multi-meter to detect the DC bias voltage.

1. Use screwdriver to take out the two upper level screws in the front panel & another two screws in the back panel. Then, open the upper case.
2. Power ON the machine with no audio signal input.
3. Wait at least 5 minutes for the machine to run in.
4. Use the multi-meter to detect the DC voltage between the test point **A(L)** [red] in the PCB & the **GND** [black] (e.g. the ring of the power switch or the outer ring of those RCA sockets) of the LEFT channel.
5. Turn the screw on the top of the **R3** potentiometer by a small screwdriver clockwise or anticlockwise until the voltage as close as to **+16.5V**.
6. Then, repeat step 4 and 5 for the RIGHT channel by changing the test point to **A(R)** [red] and turning the screw on the top of the **R13** potentiometer.
7. Power OFF the amplifier.
8. Cover back the upper case and tighten the screws.

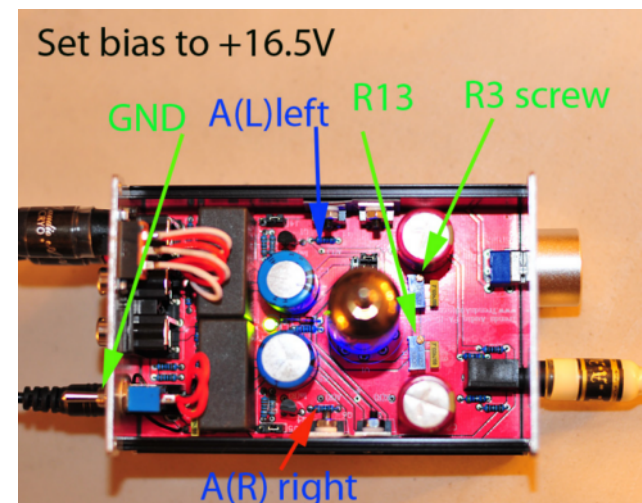

8. Specification

8.1 Trends UD-10.1 Lite USB Audio Converter

USB DAC IC	Burr Brown PCM2704 USB DAC (digital to analog converter)
USB Input	USB Type B female connector x 1
Clock	4 pin high accuracy crystal clock: ±25 ppm
Power Regulation	Regulated power for both analog & digital paths
Digital Outputs	Optical connector: TOSLINK Coaxial(RCA)connector:75 ohms Audio format: linear PCM, 16 bits per sample Sample rates: 32, 44.1, 48 kHz
Analog Output	Headphone 3.5mm jack (Volume Controlled by PC/Mac/Smartphone)
Signal-to-noise ratio	98dB
Dynamic Range	98dB
THD+N	0.006% (RL > 10 k, Self-Powered)
Audio Formats	Lossless Formats: APE, FLAC, WMA Lossless, Apple lossless or other Uncompressed formats: WAV, AIFF, PCM or other Compressed formats: MP3,AAC,Ogg Vorbis,MP2,MusePack,WMA or other
System Requirements	All systems: 256MB RAM with 30MB hard disk space Windows OS: Windows NT/2000/XP/Vista or later Macintosh: Mac OS X 10.3 or later Linux, PC LinuxOS 2007, Fedora core 7, Ubuntu 7.04 or other
Power Supply	USB Bus Power or External power(Optional): DC 4.35V – 5.25V(max) (e.g. AA size rechargeable battery 1.2V x4=5V. NOTE: Don't use normal batteries with 1.5V x4=6V, it would be too high for safety and good sound performance)
Other Switch & Knob	LED Power Indicator (Blue) x 1
Dimensions (W) x (H) x (D)	76mm x 29mm x 114mm [case only] 76mm x 29mm x 128mm [incl. sockets & knob]
Weight	250g
Case	Stylish aluminum
Accessories	1.5m type A to type B cable x 1 Mini Jack to 2 Phono Sockets Adapter x 1

8.2 Trends CQ-125 3.5mm RCA Audiophile Cable

Braiding Shield	Oxygen-Free Copper OFC
Snack-Skin Sleeve	Yes
Ferrite Ring Noise Filter	Yes
Plug	1 x 3.5mm Headphone Plug ~ 2 x RCA
Plug Material	24K Gold-Plated Pure Copper
Overall Diameter	6mm
Conductor	Oxygen-Free Copper OFC
Color	Black

8.3 Trends PW-10 PSU

AC Power Input:	110V /50~60 Hz or 220V / 50~60Hz (specific model should be selected, not compatible)
DC Power Output:	TA: +12V/3.3A DA/UD: +5V/230mA PA: +24V/420mA
AC Input Socket: IEC socket	IEC socket
DC Output Socket:	DC 2.1 socket
LED Indicator:	Main Power (Blue) TA (Green) DA/UD (Green) PA (Green)
Power Switch:	Main Power (Front) TA (Back) DA/UD (Back) PA (Back)
Dimensions (DxWxH)	205mm x 105mm x 55mm

8.4 Trends PA-10 GE/SE Tube Headphone/Pre-Amplifier

Vacuum Tube	6DJ8/6922 series or 12AU7 series (exchangeable) Standard Edition: Chinese 6N11 Tube SE Edition: Russian 6H23n GE Edition: USA 12AU7 Tube
Output Stage	MOSFET x 2
Amplifier Gain	x3 (for Audio CD/DAC IN) x6 (for Audio PC/iPod IN)
Signal-to-Noise Ratio (SNR)	92dB
Power Output	3.0 Watts per channel on 33 Ohm Headphone
Frequency response:	15 Hz - 100 kHz -1db
Input Impedance:	100k Ohms
THD+Noise	0.05% @ 10k ohm 0.15% @ 33 ohm
Input	Audio CD/DAC IN RCA (Left/Right) x 1 [3Vpp max.] Audio PC/iPod IN RCA (Left/Right) x 1 [0.55Vpp max.] Power Socket (5.5mm/2.1mm) x 1
Output	Audio OUT RCA(Left/Right) x 1 Headphone OUT (3.5mm) x 1
Other Switch & Knob	Audio IN selection switch x 1 Power ON/OFF switch x 1 Power Indicator (Blue LED under Tube Socket) x1 Volume Knob x 1
Power Supply	DC 24V-26.5V (max.)
Dimensions	(W)76mm x (H)46mm x (D)114mm
Weight	380g

*The warranty provides parts and labor for all components, except tubes. Tubes are guaranteed for 1 year.

**To continuously improve our product, we reserve the rights to change some specifications without further notice.

9. Troubleshooting

If your Trends Combo 14 is out of order, it may not be very serious. Before you call your local distributor or us to repair, you are suggested to check the following:

Symptoms	Possible Reasons	Handling Methods
cannot power ON indicator not bright	power cords not properly connected	properly connect the power cords
	power switch is OFF	switch ON the power
no sound at all	the volume level is too low	turn volume level higher
	the audio cable not properly connected	properly connect the audio cable
	the audio source (e.g. CD player) not started playing	start playing the audio source
	wrong input is selected	check input selection
	the speaker cables not properly connected	properly connect the speaker cables
hum	tube not fully pushed in	insert Tube securely
	audio connector plug not fully pushed in	insert plug securely
	incorrect input switch position	check the corresponding input switch
sound out(s) out	loose connection	check input and output connections. When all has been double-checked reduce volume and switch unit back on
The output voltage is 0 V or very low	the Input voltage is very low	Check that the input voltage is 120V or 220 V, (specific model should be selected, not compatible)
	The unit is in current limit condition due to overload caused by large reactive loading r by the output being short circuited	Check the output terminals are not shorted. Remove the load. If the output voltage gets restored, the load is shorted or is offering large reactive impedance
AC side fuse blows as soon as power is turned on.	Unit is defective	Call technical support or by email support@trendsaudio.com.

10. Accessories

- 3 Pins Power Cord x 1 pcs (IEC plug and another plug with different country standards)
- User Guide x1
- Warranty Card x1

11. Regulatory Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

12. Contact Us

ITOK Technologies Limited (Trends Audio)

Address : Rm. K, 11/F, Kwun Tong Industrial Centre, Phase 1
472-784 Kwun Tong Road, Kowloon, Hong Kong
Tel : +852 2304 0730 (9am-6pm, GMT+8:00)
Fax : +852 2566-5740
Email : sales@TrendsAudio.com (Marketing)
support@TrendsAudio.com (Technical Support)
Website : <http://www.TrendsAudio.com>